



BOT03-w: warm-white (3000 K)



BOT03-k: white (5000 K)



The Bottle-light table lamp individually and charming



- Lamp model BOT03-w with **warm-white LED light, 15 lm**
- Lamp model BOT03-k with **white LED light, 15 lm**
- **Insertable in all standard wine, Champagne, and other bottles** with a bottleneck inner diameter of 17-20 mm
- **battery powered** by 3 standard AA alkaline or recharg. batteries
- easy to use and to install
- **illumination time of 120 hours per battery set**, or continuous operation by the USB battery replacement module BOT06
- 100 000 hours lifetime
- **waterproof in the lower part and rain proof from above**
- ideal for home, restaurant, bar, garden table, party, camping
- no fire danger
- made in Germany





Product description

The Bottlelight lamp insert fits into all empty wine, champagne, and other bottles with an inner bottleneck diameter of 17-20 mm, and it gives a nice spread comfortable light over a wide surface. Power is supplied by three standard AA alkaline or rechargeable NiMH batteries. The batteries can be easily filled or replaced through the opening with an open lid. The lamp can be switched on/off by turning the lid clockwise/anti-clockwise. The electronic keeps the light intensity stable.

For a continuous operation a battery replacement module BOT06 for a USB power supply is available.

The lamp is water resistant at the bottom part and rain resistant from the top.

Even as the device is water resistant, it must not be put into beverages. The manufacturer does not accept any liability in such cases. The device must be kept away from children under the age of 3.


The lamps come in single or triple packages and without batteries as standard.

Overview about the available Bottlelight models:

Type/Model	Description	EAN/UPS Code
BOT02-w	LED Bottlelight lamp, extra bright, warm white, 40 lm	0762743431151
BOT03-w	LED Bottlelight lamp, warm-white light, 15 lm	0610098499909
BOT03-k	LED Bottlelight lamp, cold white light, 15 lm	0700621847410
BOT03-wT	LED Bottlelight lamp triple pack warm-white light, 15 lm	0610098499923
BOT03-kT	LED Bottlelight lamp triple pack cold white light, 15 lm	0610098499916
BOT04-w	LED Bottlelight lamp, extra bright, warm white light, 15/40 lm dimmable	4893263135055
BOT04-wb	LED Bottlelight lamp in brass, extra bright, warm white light, 15/40 lm dimmable	0762743431175
BOT04-k	LED Bottlelight lamp, extra bright, cold white light, 15/40 lm dimmable	0762743431045
BOT05	LED Bottlelight lamp, white, color light and brightness adjustable, 15-50 lm	0610098499930
BOT05-wb	LED lamp in brass, warm white, color light and brightness adjustable, 15-50 lm	0762743431182
BOT06	Battery replacement module for use with USB power supply	4893263135062
BOT07	LED Bottlelight lamp, rechargeable, touch sensor, very bright 10-230 lm	0762743431052

Packaging

- (1) The lamp is packed in a rectangular carton box with a printed feature descriptions, images and EAN-Code.
Descriptions in languages: DE, EN, F, ES, NL, IT
User Manual in: DE, EN, NL, FR, IT, ES, PT, SE, JP
Size: 290 x 75 x 27 mm (11.4 x 3 x 1 inch)
Weight without/with batteries: 100 g / 170 g
- (2) Triple package as above but with three lamps inside.
Weight without batteries: 207 g
- (3) Natural Bamboo packaging for one lamp.
Size: Ø 29 x 280 mm (Ø 1,14 x 11 inch)
Weight without/with lamp: 53 g / 113 g

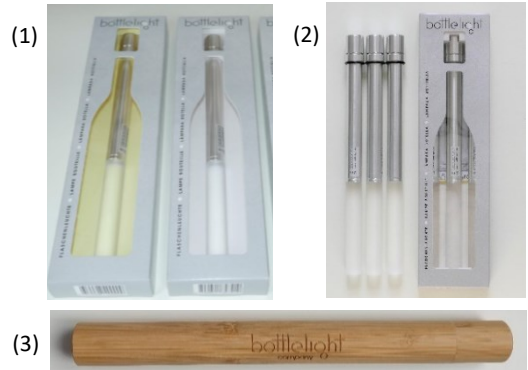

Manufacturer

Bottlelight Company Dr. Kitzenmaier, Address see below; Country of Origin: Germany

Technical Data (BOT03)

Length total	256 - 266 mm ± 5mm (10.23-10.63 inch)	LED efficiency	170 lm/W
Length of Light beam	100 mm ± 5mm (3.9 inch)	Luminous flux of LED	14 – 15 lm
Length within a bottle	230 mm ± 5mm (9.1 inch)	Model BOT03-w light	warm white, 3000 K, 15 lm
Diameter lower part	17 mm ± 0.2mm (0.67 inch)	Model BOT03-k light	white, 5000 K, 15 lm
Diameter Lid	20 mm ± 0.2mm (0.79 inch)	Lifetime	100 000 hours
Materials	Aluminum, acrylic glass, EPDM	Supply voltage	3 – 6 V DC
Weight wt/w batteries	57 ±2 g (0.125 lbs) / 126 ±10 g (0.278 lbs)	Current consumption	25 – 35 mA
On/Off Switching	by slightly turning the lid	Power Supply	3x AA cells à 1.2V / 1.5V
Operating temperature	-20 ... +65°C (-4 ... 149°F)		or battery replacement module BOT06
Conformity	CE, RoHS, REACH, WEEE-DE 17359610	Guarantee	2 years
International Customs ID	8513 1000 (US: 8513.1040)		